


PRODUCT INFORMATION

ATOMIZER HEAD RANGE : BF

VIDEO LINK Click [HERE](#) to review the video accompanying this information.

BF atomizer heads are used with tanks and devices where the air flows through the top, and these devices are also filled from the top. The BF 1.5ohm Clapton is suitable for new and regular vapers, and is the most popular replacement atomizer head in the range. The BF atomizer head is suitable for both regular and high vapers, fits many discontinued kits and remains one of our best selling atomizer heads.

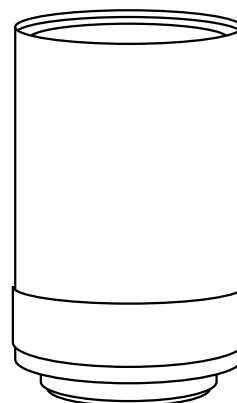

AVAILABLE RESISTANCES, COIL MATERIAL AND PREFERRED POWER LEVELS

Resistance (ohms)	Coil Material	Wicking Material	Ideal Power (watts)	Power Range (watts)
0.5	Stainless steel 316	Natural Cotton	23	16 - 35
0.6	Stainless steel 316	Natural Cotton	20	11 - 32
0.8 BFC	Kanthal	Natural Cotton	17	12 - 21
1.0	Stainless steel 316	Natural Cotton	17	12 - 24
1.5 Clapton MTL	Kanthal	Natural Cotton	12	7 - 14
1.5 LVC Clapton MTL	Kanthal	Natural Cotton	15	7 - 18.5
0.2	Nickel	Natural Cotton	Temperature controlled atomizer head	

STANDARD ATOMIZER HEADS SUPPLIED WITH TANKS AND KITS:

TW AIO 2 kit - 1.5ohm Clapton

TW AIO kit - 1.5ohm Clapton

Corsair Mini Pro tank - 1.5ohm Clapton, 0.5ohm SS316

TW AIO 3 kit – 0.8 BFC


FEATURES AND BENEFITS

- The BF range has “top fill, top airflow” design which reduces the chances of a tank leaking.
- The BF 1.5ohm Clapton MTL atomizer head offers restricted air flow, ideal for new and regular vapers.
- The BF 0.5ohm atomizer head can handle the most power in the range and produces the highest power in direct output.
- The BF 0.6ohm atomizer head has a greater airflow than the BF 1.5ohm and should be recommended for customers looking to increase their vapour production.
- LVC (Liquid Valve Control) changes the amount of vapour produced by increasing or reducing the flow of e-liquid into the atomizer head.
- Working power range of between 7 and 35 watts.

PRODUCT INFORMATION

ATOMIZER HEAD RANGE : BF

BF ATOMIZER HEADS

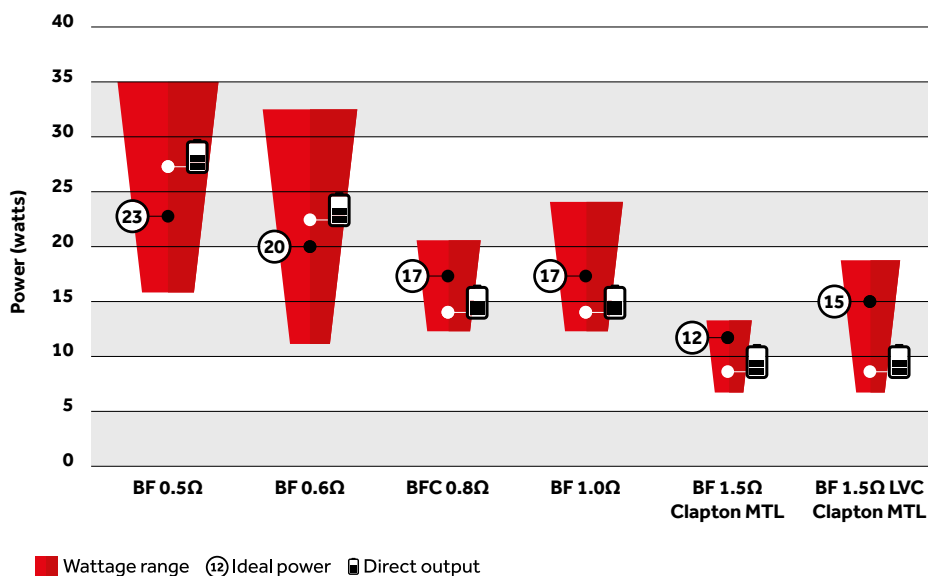


COMPATIBILITY

- Kanthal atomizer heads are compatible with power, bypass, variable voltage and smart modes.
- Stainless steel 316 atomizer heads are compatible with power, bypass, variable voltage, smart and temperature control modes
- The BF 0.2ohm Nickel atomizer head is not compatible with the AIO kit.
- BF 1.5ohm Clapton MTL and 1.0ohm atomizer heads are the best suited for use with direct output devices. The direct power is below the suggested wattage, avoiding poor flavour and vaping experience.

ADDITIONAL NOTES

- If BF atomizer heads spit or gurgle while vaping or after filling, firmly flick the mouthpiece toward the floor to clear.
- Should a customer want to increase the vapour production we recommend using a progressively lower resistance atomizer head until the desired vaping experience is met.

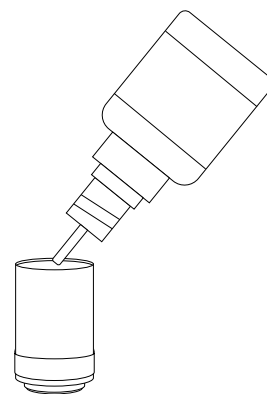

PRIMING

BF atomizer heads are primed by dripping a few drops of e-liquid into the central hole.

After priming a new atomizer head and filling the tank, it is recommended to wait 5 minutes before vaping to ensure the atomizer head is fully saturated.