

**TOTALLY
ΨICKED®**

**arc
GT2**




USER MANUAL

**CONGRATULATIONS
ON PURCHASING YOUR**




YOUR ARC GT2

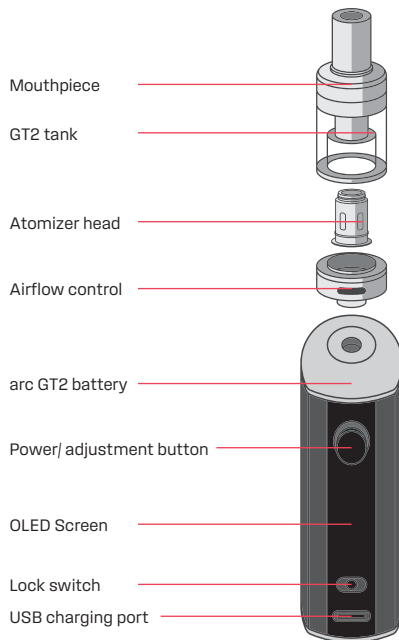




QUICK START GUIDE

PRIME THE ATOMIZER HEAD




Wait 5 minutes before vaping
a new atomizer head.


INSTALLING THE ATOMIZER HEAD

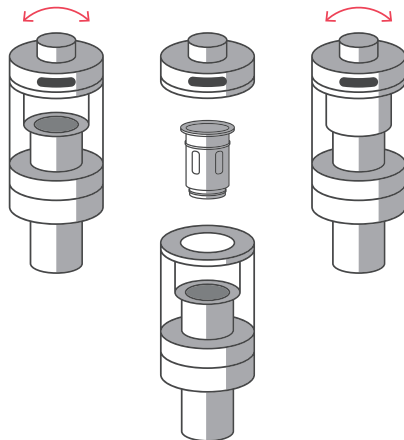


**SLIDE
MOUTHPIECE
OPEN**

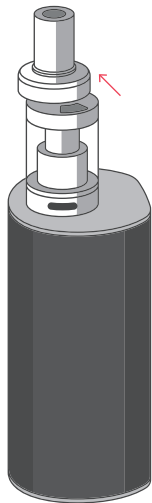


**FILL TANK
WITH E-LIQUID**

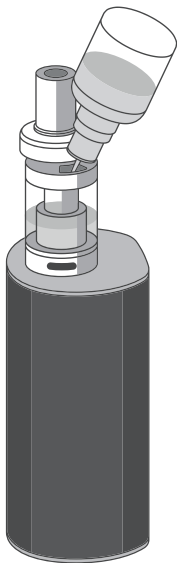


**CLOSE
MOUTHPIECE**

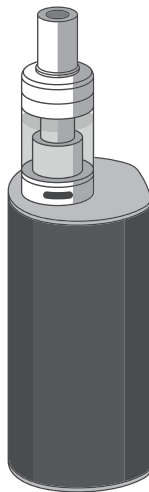

**ADJUST
AIRFLOW**

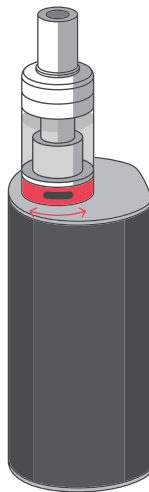

POWER ON/OFF & VAPING

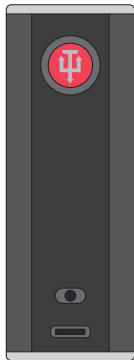


x5
On/Off



Press and hold
whilst inhaling
on mouthpiece

ADJUST POWER

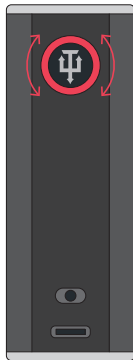

Rotate power button to
adjust power up or down.

LOCK SWITCH



Slide to lock the power
and adjustment functions.

CHARGING



USING YOUR ARC GT2

INSTALLING THE ATOMIZER HEAD

To install the atomizer head in the GT2 tank unscrew the base from the tank. Remove the atomizer head from all its packaging and insert into the tank. Screw the base back onto the tank.

FILLING THE GT2 TANK

The GT2 tank has a sliding top-fill mechanism. To fill the tank push the top of the tank in the direction indicated by the arrow. Push the bottle nozzle through the slotted silicone seal and fill with e-liquid, ensuring to leave a 2mm air gap. Slide the tank closed.

Note: When a new atomizer head is fitted, it is recommended to wait 5 minutes after filling the tank to ensure the atomizer head is fully saturated.

POWER ON AND OFF

To turn the device on or off, quickly press the power button 5 times. When switching on, the screen on the front of the device will light up. It will then display current battery charge level, selected wattage, atomizer head resistance, and puff count.

VAPING

The Totally Wicked arc GT2 is used by pressing the power button while inhaling on the mouthpiece.

LOCK SWITCH

The Totally Wicked arc GT2 includes a 3-position sliding switch dedicated to locking the device. It is located towards the bottom of the device, underneath the screen. In the leftmost position, the power button and wattage adjustment wheel are deactivated. In the centre position, the power button is active, but wattage adjustment remains locked. In the rightmost position, both the wattage adjustment and power button are active.

ADJUSTING THE POWER

The Totally Wicked arc GT2 has adjustable wattage from 5 to 80W in 1W increments. Before adjusting the wattage, make sure the lock button is in the rightmost position. Turn the power button clockwise to increase the wattage, and anticlockwise to decrease.

ADJUSTING THE AIRFLOW

The Totally Wicked arc GT2 has an adjustable airflow control located on the side of the tank. Turn the adjuster to the right to reduce airflow, or to the left to expose more holes and increase airflow.

DEVICE MODES

The arc GT2 has two different power modes, "POWER" and "RTA". Power mode provides simple wattage adjustment. RTA mode allows the voltage to be adjusted instead of wattage. To switch between these modes, press the power button 3 times in quick succession, and use the wattage adjustment wheel to select the desired mode.

USING YOUR ARC GT2

DEVICE DISPLAY

The arc GT2 has two different display themes, "Bubbles" and "Pulse". The themes have no bearing on the performance of the device, changing only the graphical display of information on the screen. To switch between these modes, press the power button three times, and use the wattage adjustment wheel to scroll your choice of display. Once highlighted, press the power button again to confirm.

PUFF COUNTER

The Totally Wicked arc GT2 has a built-in puff counter for monitoring use of the device. The latest value will be displayed as soon as you stop vaping. The puff counter will continue to count up to 9999, at which point it will revert to counting from 0. To manually reset the puff counter, enter the menu by pressing the button 3 times, scroll down to "puff clear" using the wattage adjustment button and press the power button to confirm.

CHARGING THE BATTERY

The Totally Wicked arc GT2 generally requires charging every 2-3 days, but dependent on use. A newly charged battery will provide sufficient power for approximately one bottle of e-liquid, dependent on atomizer resistance. To charge the battery, connect the arc GT2 to a suitable USB power supply using the USB-C cable provided. When charging, the screen will indicate the current level of charge.

BATTERY LIFE INDICATION

The Totally Wicked arc GT2 displays current battery charge level as a percentage at the top of the screen.

CLEANING THE ARC GT2

Clean the Totally Wicked arc GT2 using a soft dry cloth or tissue; care should be taken to avoid direct contact with water. Clean the tank connection point in the battery carefully using a dry cotton swab.

Note: To avoid damaging the atomizer head, do not allow it to come into contact with water. Do not submerge the Totally Wicked arc GT2 battery unit in water or allow it to get wet.

KIT CONTENTS

- 1 x arc GT2 battery
- 1 x GT2 tank
- 2 x GTL 0.8ohm atomizer heads
- 1 x USB-C cable
- 1 x User manual

SPECIFICATIONS

- Dimensions: 128mm x 39mm x 28mm
- Weight: 147g
- Battery capacity: 3200mAh
- Max charging current: 2.0A

USING YOUR ARC GT2

ADDITIONAL PRODUCT INFORMATION

There are no reported medical side effects with this product. If you believe you experience a side effect, please contact the manufacturer.

SAFE PRODUCT DISPOSAL

Vapes should never be disposed of in general household waste. Instead, they need to be recycled in line with waste regulations. To correctly dispose of a vape battery, visit your local vape store to see if they have a collection point (available at all Totally Wicked stores), or check with your local council to see if there is specific disposal available at your local waste treatment facility.

WARRANTY

The Totally Wicked arc GT2 has a 6-month parts warranty with the exception of atomizer heads, which are consumable items and covered by “dead on arrival” warranty only. If any parts are found to be faulty within this time, please contact our customer service team, whose details are on the back page of this booklet, and we will arrange for a replacement. We may require the goods to be returned for further investigation.

PRODUCT STORAGE, CHARGING AND BATTERY PRECAUTIONS

- Store the arc GT2 and its accessories away from children whilst not in use.
- Please only use the USB-C cable provided or a genuine TW accessory.
- The arc GT2 is intended to be charged using a certified USB charger with a rated output of 5V dc, 0.5A minimum, or a certified host computer using USB 2.0 or higher. A suitable charger is available from all dedicated Totally Wicked stockists.
- Unplug the battery from the charging device as soon as it is fully charged.
- Do not leave battery unattended when on charge.
- Do not charge the battery close to flammable materials or valuables.
- Do not charge the battery in a damp environment, or in temperatures under 0°C or above 45°C.
- Do not use the device in temperatures under -10°C or above 60°C.
- Please dispose of dead batteries in accordance with your country's appropriate legislation.
- Do not carry batteries in a pocket or bag with metallic objects.
- Do not attempt to repair a faulty arc GT2 battery as these are sealed units with no serviceable parts. Attempted repairs will void the warranty.

TOTALLY ΨICKED®

Manufactured in China
under the authority of
Pillbox38 (UK) Ltd, Stancliffe Street,
Blackburn, Lancashire, BB2 2QR.
Tel: 01254 692244
www.totallywicked.co.uk

